

cloud



Model: CL03+

Applicable scenes: Pedestrian passages in residential quarters, office buildings, schools, government agencies, tourist attractions, factory sites, etc.

Main features: Face recognition opens, experience smooth Face recognition attendance application opens IO signal control Support offline use support access card, IC card, palm vein.

- Support nighttime fill light with photosensitive sensor coordination;
- Support external identity card/IC card reader;
- WiFi
- English as default language, other language be customized
- Support serial port, Wiegand output, output content support configuration;
- Adopt dynamic face detection and tracking recognition algorithm based on video stream;
- Recognition speed is fast, it takes about 20ms on face tracking and detection, 300ms on face feature extraction and 1s on face comparison
- Support face recognition scene photo saving;
- Support interface docking and support customization;
- Support LAN device deployment;
- Support screen display content configuration, custom company name and LOGO;
- Support for identifying distance configurations.

TECHNICAL SPECIFICATIONS

Hardware	CPU	Dual-Core 1.2GHZ
	NPU	0.5 Tops
	Operating system	LINUX
	LCD display	2.4 " IPS touch color screen (240*320)
	RAM	128 MB
	ROM	256 MB

Specification of Model CL03+:


Capacity	User	1,500
	Palm Vein	500
	Fingerprint	5,000
	Password	1,500
	Card	1,500
	Logs	200,000
Operating	Power supply	DC12V / 2A
	Recognition distance	0.5-2 meters (Live detection: 0.5~1meter)
	Operating temperature	-30 ° C - + 60 ° C
	Working humidity	10 %~90%
	Use environment	Indoor
Communication	Communication mode	TCP/IP, USB 2.0, U-disk, WiFi
	Access Control Output	Wiegand26/34, door magnetism, electric lock, open button, electric bell, door bell

Dimensions:



Application:

Type 1 :

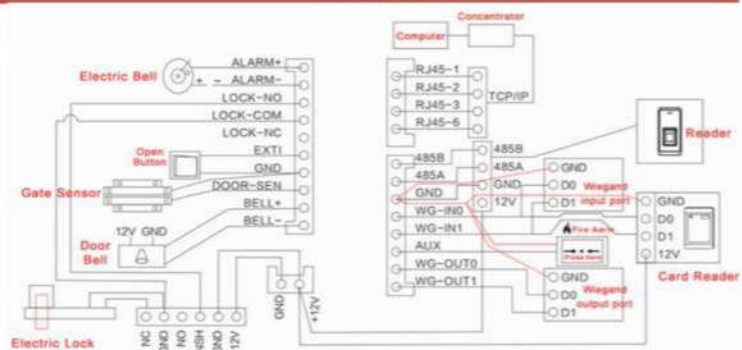

Type 2 :

