



## CT503 Product Show

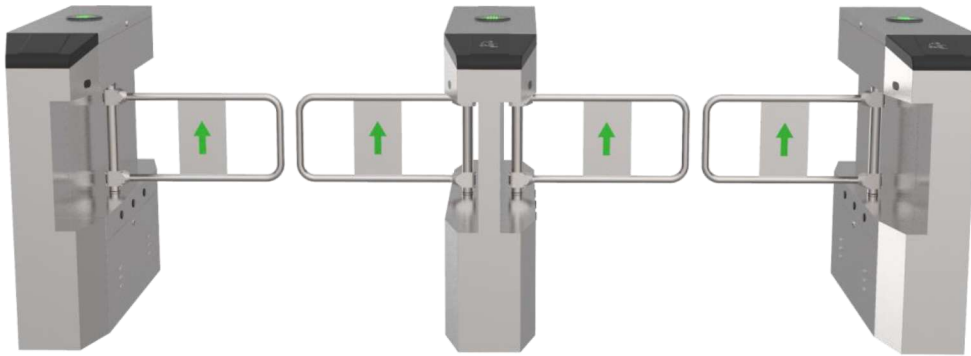

two-channel

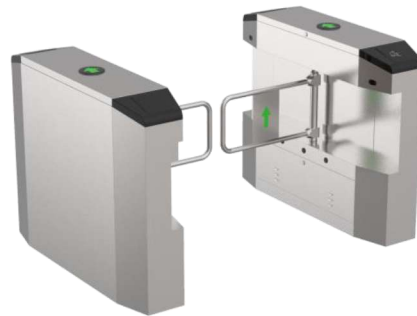

Single channel



Authorized Distributor and Service Center

## Nedo Pakistan

Karachi ! Lahore ! Islamabad


[www.nedogroup.com](http://www.nedogroup.com)

UAN: 021-111-633-675

## Functions & Features

- 1、 Reasonable and reliable design, low noise, smooth operation and long service life;
- 2、 With functions of anti-tail, anti-reverse pass and so on;
- 3、 Card can be set "with memory" or "without memory" functions;
- 4、 With automatic reset function, i.e. after having access to the gate, the gate automatically restores to the locked state if not pass within the time set;
- 5、 With infrared anti-clip function (anti-clip when gate is open or running);
- 6、 Compatible with IC, ID card, scanning and face recognition,etc.
- 7、 Two modes of operation are available: open or closed.
- 8、 Various working modes are available, including two-way card reading and one-way card reading,etc.

## Product Size

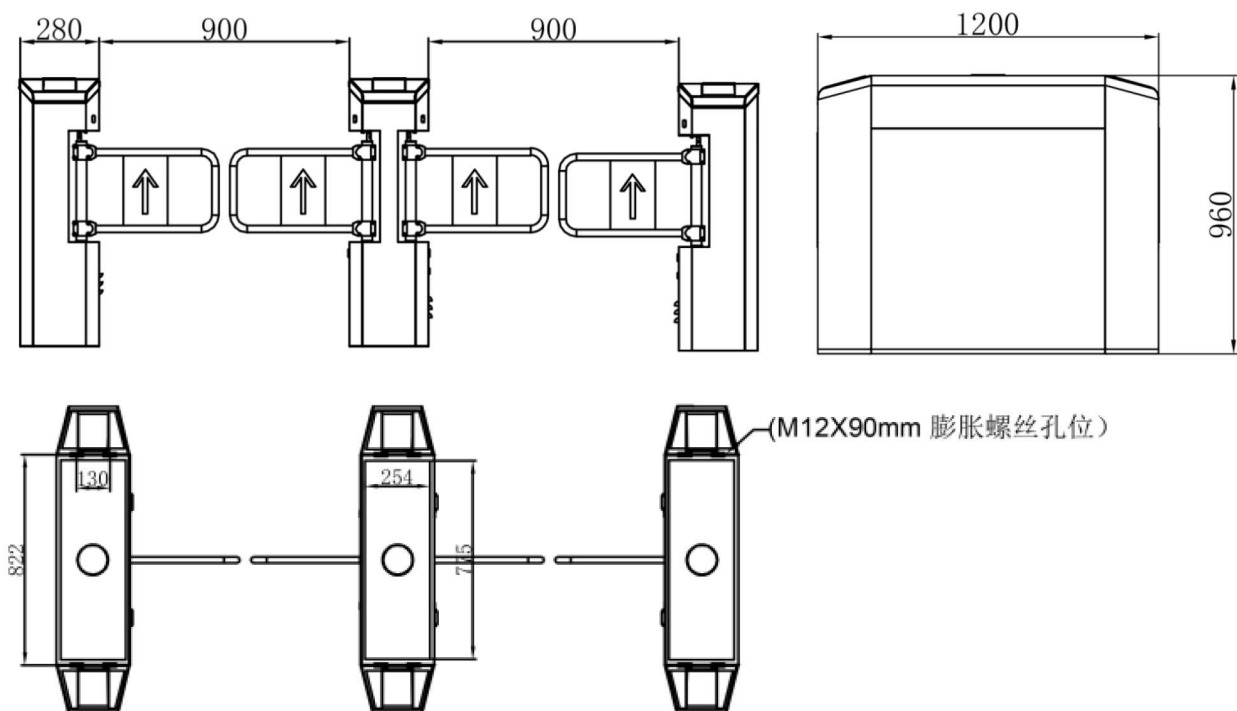

## Parame-

|                                |                                                  |
|--------------------------------|--------------------------------------------------|
| <b>Size (L*W*H)</b>            | 1200*280*960mm                                   |
| <b>Pass width</b>              | 600-1100mm                                       |
| <b>Power</b>                   | 50W                                              |
| <b>Material</b>                | Top $\delta$ =1.2mm/ body $\delta$ =1.0mm SUS304 |
| <b>Bar Material</b>            | SUS304                                           |
| <b>Movement</b>                | Brushless Movement of Swing Gate                 |
| <b>Infrared sensor</b>         | 5 pairs                                          |
| <b>Indicator Light</b>         | Dynamic indicator light                          |
| <b>Drive Unit</b>              | Brushless DC Motor 90K 40W                       |
| <b>Power Supply</b>            | 24V 150W                                         |
| <b>Control Unit</b>            | Brushless control system                         |
| <b>Communication Interface</b> | Dry contact & RS485                              |
| <b>Pass rate</b>               | 35-50 persons/minute                             |
| <b>Temperature</b>             | -20°C~+70°C                                      |
| <b>Humidity</b>                | ≤90% No condensation                             |
| <b>IP</b>                      | IP4X                                             |
| <b>Environment</b>             | Indoor and outdoor (outdoor with canopy)         |



Authorized Distributor and Service Center

**Nedo Pakistan**

Karachi ! Lahore ! Islamabad

[www.nedogroup.com](http://www.nedogroup.com)

UAN: 021-111-633-675

## Case share



Authorized Distributor and Service Center

## Nedo Pakistan

Karachi ! Lahore ! Islamabad

[www.nedogroup.com](http://www.nedogroup.com)

UAN: 021-111-633-675