



cloud

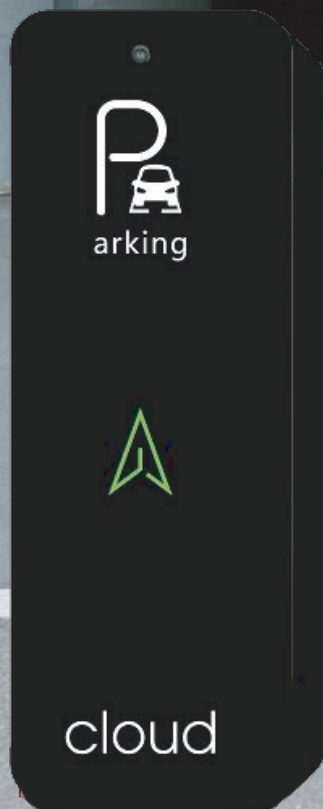

With Bar upto
6m (3+3m)



CLOUD CB6000 Plus

Speed Adjustable, High Stability

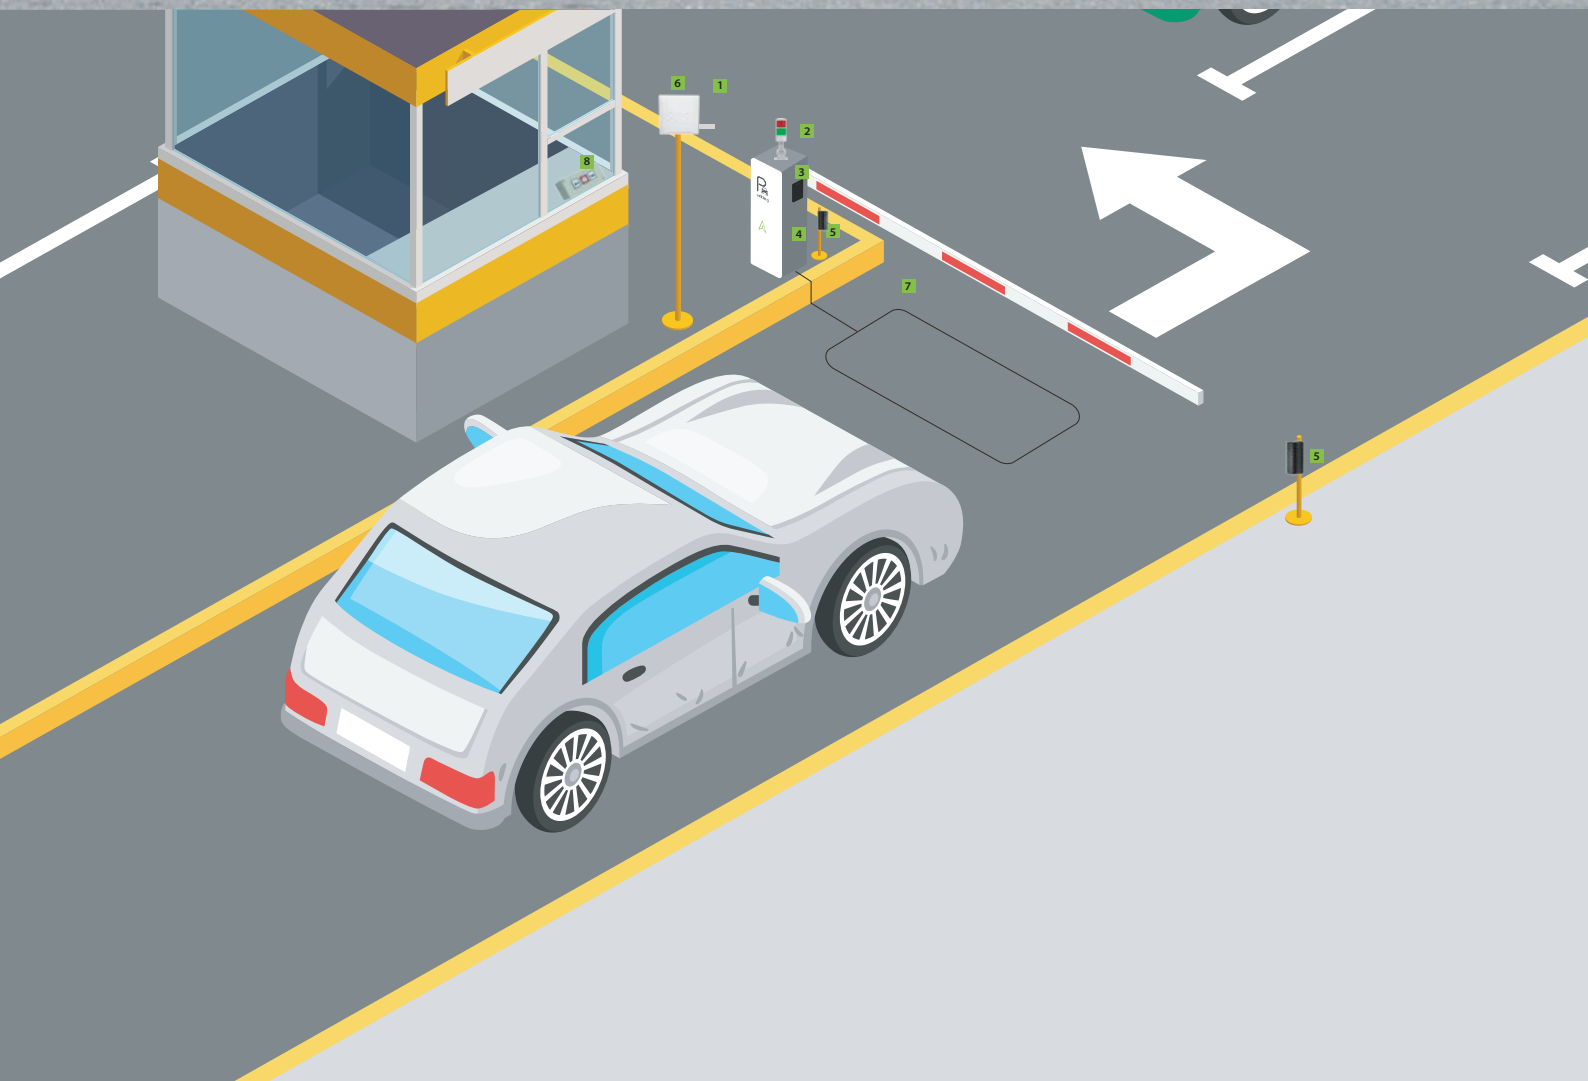


CB6000 Plus series barrier gate is driven by high-performance brushless DC motor, stable running, low noise, stable and reliable performance. The gate control system is rich in interfaces, widely used in all kinds of parking lot entrance and exit channel management.

Optional Accessories



Dimensions (mm)

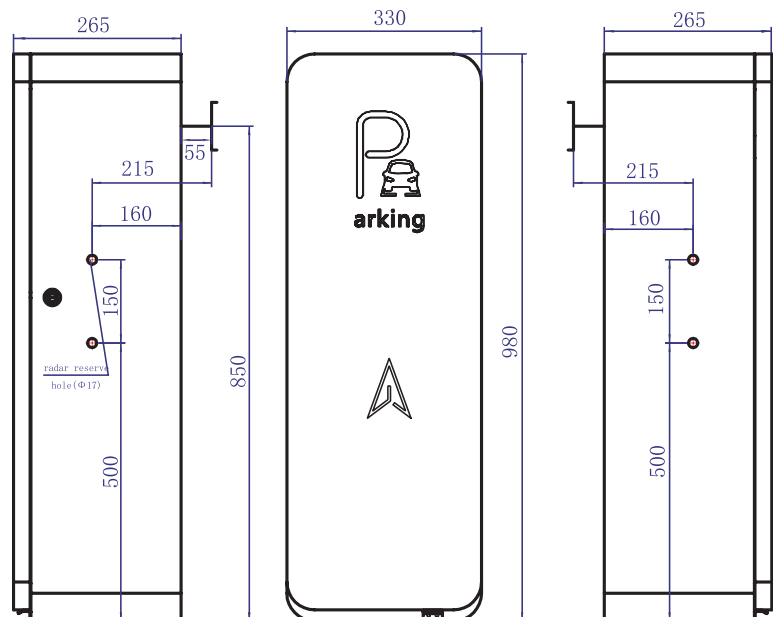

Authorized Distributor and Service Center

Nedo Pakistan

KARACHI | LAHORE | ISLAMABAD

www.nedogroup.com
UAN: 021-111-633-675

Tecnicinal Specifications

Model	CB6000 Plus
Operating Speed	1.5s to 6s
Boom Length	6m (3+3m)
Boom Type	Telescopic straight boom
Motor Type	DC 24V brushless motor
Output Power	160W
Output Current	10A
Operating Voltages	DC 24V
Power Supply	AC 220V/110V, 50Hz to 60Hz
MCBF	2 million times
Remote Control Distance	≤30m
Operating Temperature	-30°C to 75°C
Protection Level	IP54
Chassis Dimensions (mm)	330*265*980mm
Net Weight (excluding the barrier arm)	40kg

Features



Highly energy-efficient because of the DC brushless motor



Digital control mainboard with diverse configuration possibilities



The barrier arm will rebound when an obstacle detected




Reversible boom direction



Delay automatic close



Manual rise and fall in case of absence of power



Traffic light signal output



Failure warning



Authorized Distributor and Service Center

Nedo Pakistan

KARACHI | LAHORE | ISLAMABAD

www.nedogroup.com
UAN: 021-111-633-675